



ELMO

TD 62MS 60Hz/1506-23

U

V.le Certosa 8/B - 27100 Pavia Italy  
Tel. ++39 382 529564 - 422372  
Fax. ++39 382 527041  
E-Mail: info@elmoitaly.com

SUBMERSIBLE MOTORS FOR HYDRAULIC LIFTS  
UNTEROELMOTOREN FUER HYDRAULISCHE AUFZUEGE  
MOTORI IMMERSI PER ASCENSORI IDRAULICI



PERFORMANCE DATA SHEET Without flywheel 2 POLES SINGLE PHASE

Table with columns for BASIC PART NUMBER, FULL LOAD DATA, DATA FOR SELECTING MOTORS, and various performance metrics like OUTPUT, CURRENT, SPEED, etc.


200 - 208 V 60 Hz

Performance data table for 200-208V 60Hz, including columns for HP, kW, Nm, V, A, P.F, RPM, %, and motor weight.

220 - 230 V 60 Hz

Performance data table for 220-230V 60Hz, including columns for HP, kW, Nm, V, A, P.F, RPM, %, and motor weight.

- FOR MOTORS WORKING INTO HYDRAULIC OIL AT 45°C - UNTEROELMOTOR IN OEL 45°C - CON MOTORE IMMERSO IN OLIO IDRAULICO A 45°C
INCLUSIVE OF THE HYDRAULIC LOSSES DUE TO THE ROTATION INTO OIL AT 45°C - INKL. DREHZAHLUERLUSTE IM OEL BEI 45°C
THE SELECTING OUTPUT CORRESPONDS TO A 30 PCT TORQUE OVERLOAD AND TO 3300 AT 60 Hz FICTITIOUS RPM.

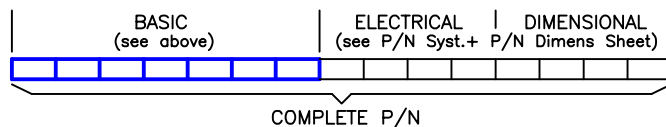

Duty types at full-load: S2 30 min. For different operating conditions please contact us.
Betriebsarten bei Vollast: S2 30 min. Für unterschiedlichen Betriebsbedingungen wenden Sie sich bitte an uns.
Tipi di servizio a pieno carico: S2 30 min. Per condizioni operative differenti contattateci.

IN ANY MOMENT AND WITHOUT NOTICE ELMO CAN CHANGE MANUFACTURING PROCESS, PERFORMANCE FEATURES.

LA ELMO S.r.l. SI RISERVA IL DIRITTO DI APPORTARE QUALSIASI VARIAZIONE SENZA ALCUN PREAVVISO.