

Suitable to be coupled screw pumps having shaft Ø32 mm and flange Ø111.1 mm

LA ELMO S.r.l. SI RISERVA IL DIRITTO DI APPORTARE QUALSIASI VARIAZIONE SENZA ALCUN PREAVVISO.

IN ANY MOMENT AND WITHOUT NOTICE ELMO CAN CHANGE MANUFACTURING PROCESS, PERFORMANCE FEATURES.



ELMO

V.le Certosa 8/B - 27100 Pavia Italy
 Tel. ++39 382 529564 - 422372
 Fax. ++39 382 527041
 E-Mail: info@elmoitaly.com

MOTORI IMMERSI PER ASCENSORI IDRAULICI
 SUBMERSIBLE MOTORS FOR HYDRAULIC LIFTS


UNTEROELMOTOREN FUER HYDRAULISCHE AUFZUEGE

MOTEURS IMMERGES DANS L'HUILE POUR ASCENSEURS HIDRAULIQUES

MOTORI TRIFASI THREE PHASE MOTORS DREIPHASEENMOTOREN MOTEURS TRIPHASES



60 Hz
 22TS-U-US8
 1609-15

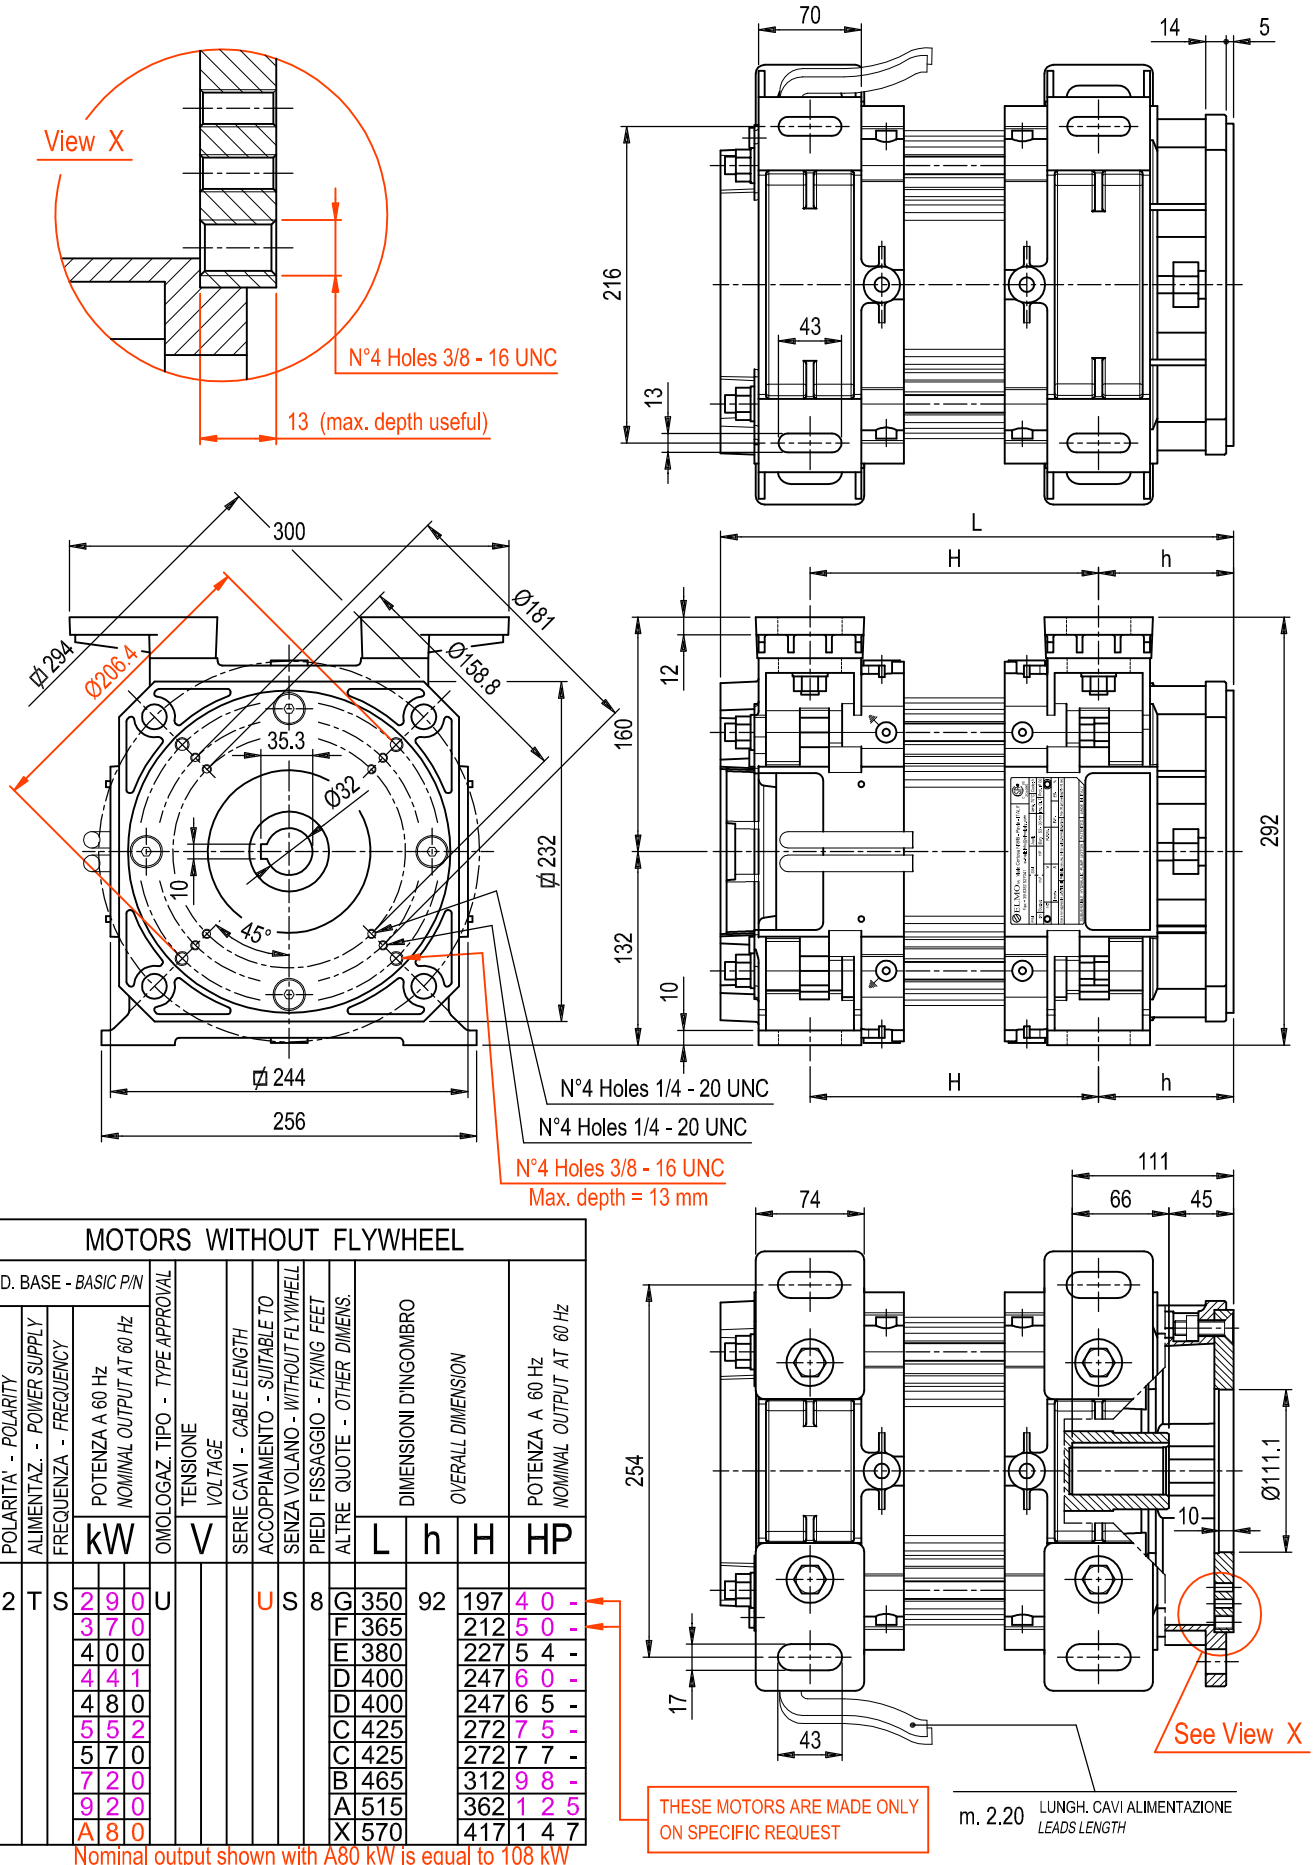

MOTORS WITHOUT FLYWHEEL

COD. BASE - BASIC P/N		KW	TENSIONE VOLTAGE	SERIE CAVI - CABLE LENGTH	ACCOPPIAMENTO - SUITABLE TO	PIEDI FISSAGGIO - FIXING FEET	ALTERE QUOTE - OTHER DIMENS.	DIMENSIONI D'INGOMBRO OVERALL DIMENSION			POTENZA A 60 Hz NOMINAL OUTPUT AT 60 Hz	
GRANDEZZA - SIZE	POLARITA' - POLARITY							L	h	H		HP
2	2	2 9 0	U		U	S	8	G	350	92	197	4 0 -
		3 7 0						F	365		212	5 0 -
		4 0 0						E	380		227	5 4 -
		4 4 1						D	400		247	6 0 -
		4 8 0						D	400		247	6 5 -
		5 5 2						C	425		272	7 5 -
		5 7 0						C	425		272	7 7 -
		7 2 0						B	465		312	9 8 -
		9 2 0						A	515		362	1 2 5
		A 8 0						X	570		417	1 4 7

Nominal output shown with A80 kW is equal to 108 kW